

CMB-374S

Mini Barebone system

Installation Guide

Edition 1.01

2025/02/10



Document Content:

- Packing List
- Product Specification
- Hardware Installation



Packing List:

CMB-374S Chassis x 1
(Including LE-374 Motherboard)




DSPD-080-12 80W AC-DC Adapter x 1
SATA & SATA Power Cable x1
Audio Cable x 1
USB cable x 1
DC Power Cable x 1


CMB-374S

Hardware Installation:

Motherboard placement

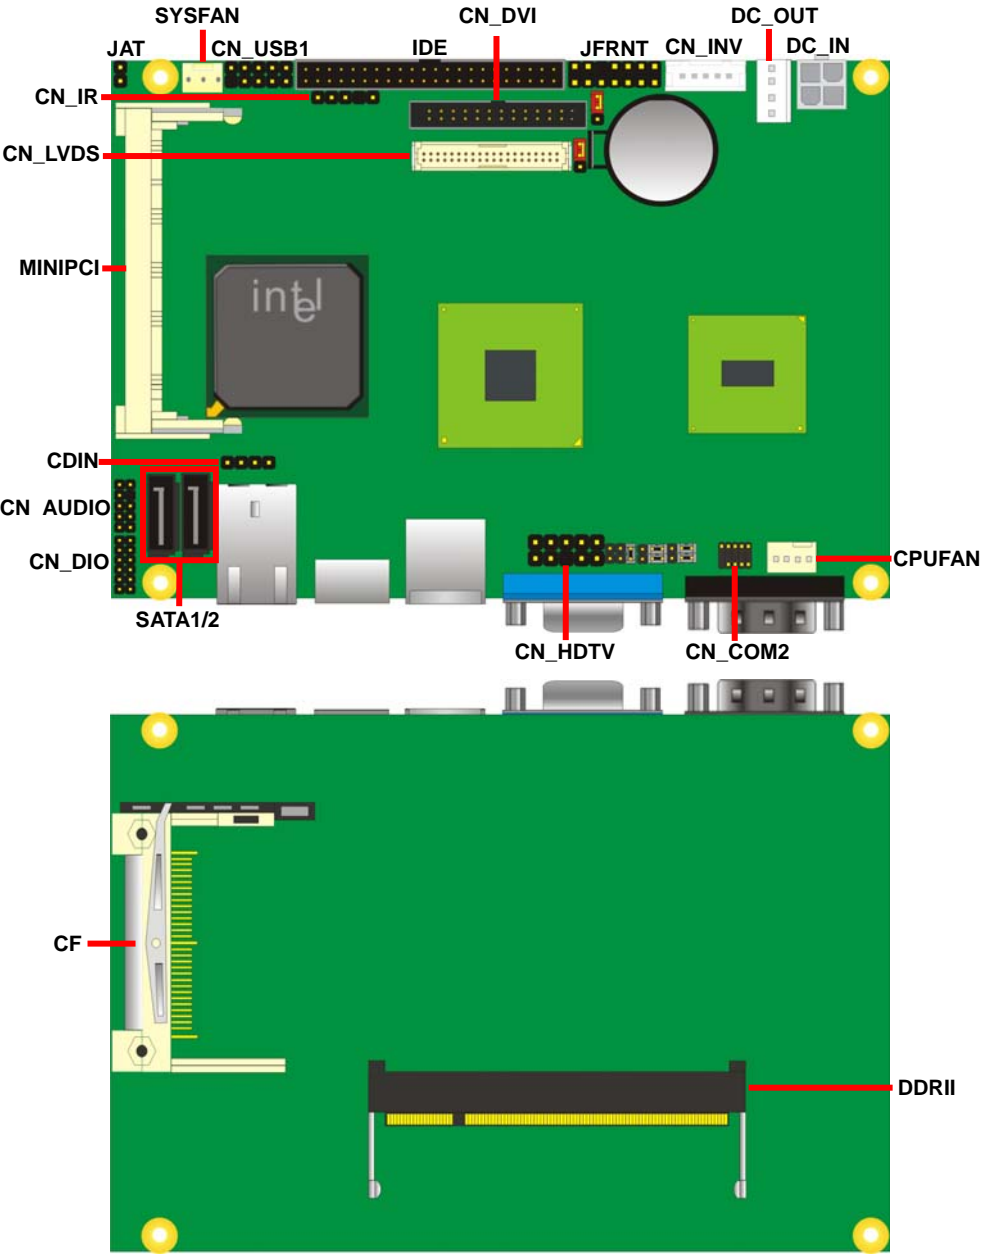

Front:

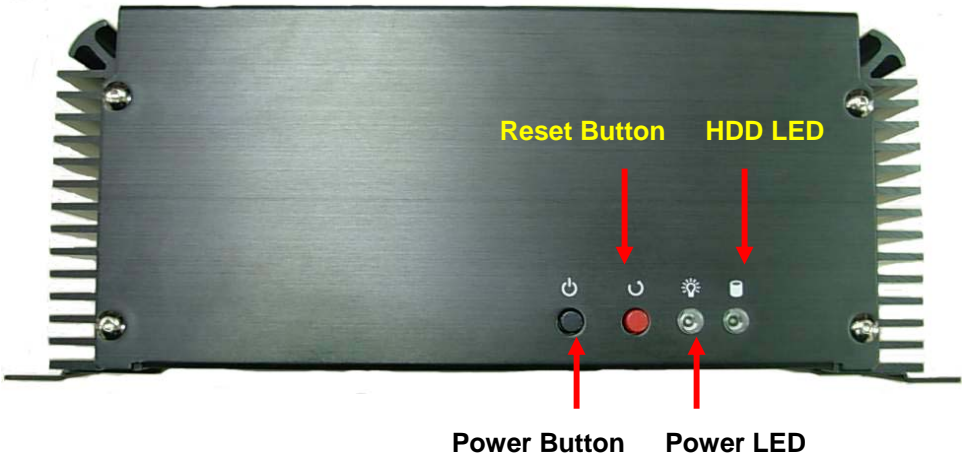

Rear:



Chassis Setup procedure:

1. Remove the support screws.



2. Then remove the supports.




3. Remove chassis screws.

Front:




Bottom :

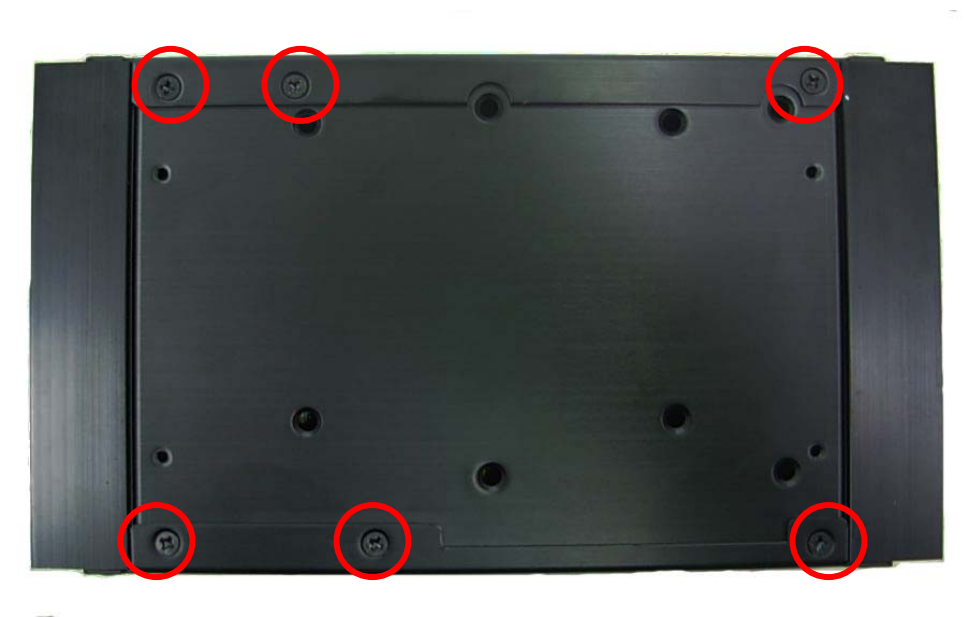


4. Push opened the Chassis front panel.



5. Removed the baseplate.

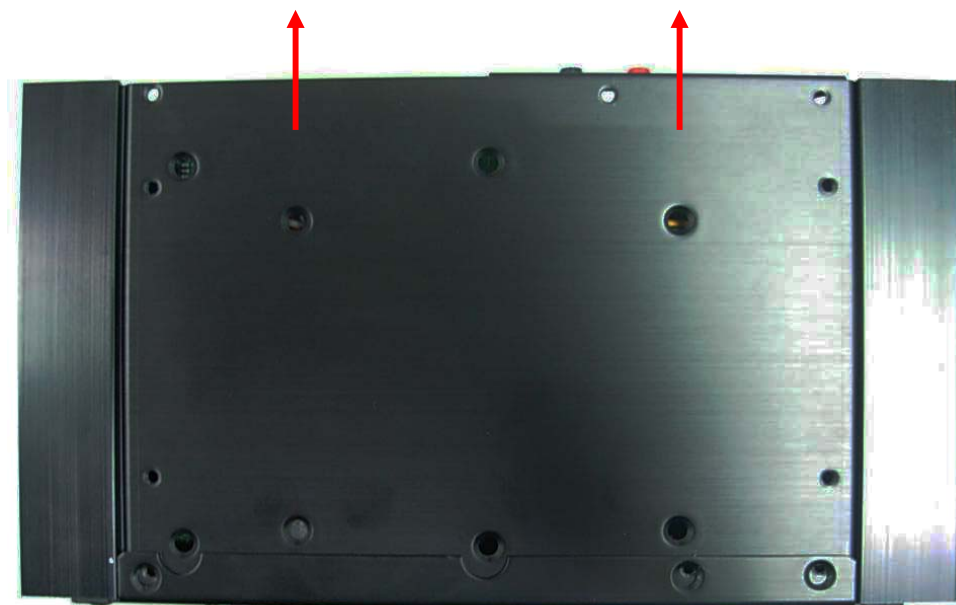

6. Insert the DDRII SO-DIMM module into the socket at 45 degree.
Press down the module with a click sound.


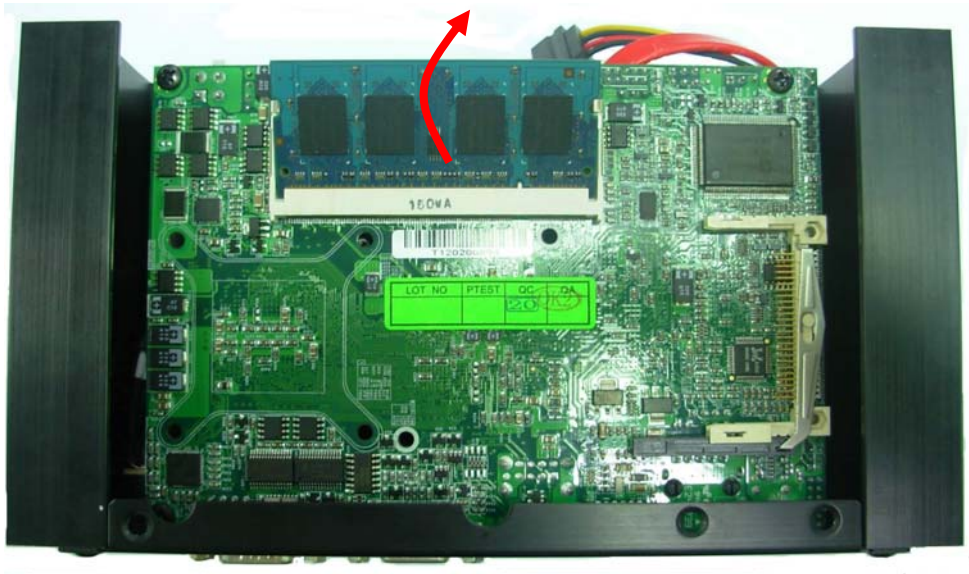



Use IDE HDD: (It needs 44-pin to 44-pin ATA33 IDE Cable x1)


7. Put on HDD driver and lock the screws.



8. Connect the IDE cable , and power LED , HDD LED , reset bottom , power bottom cables.

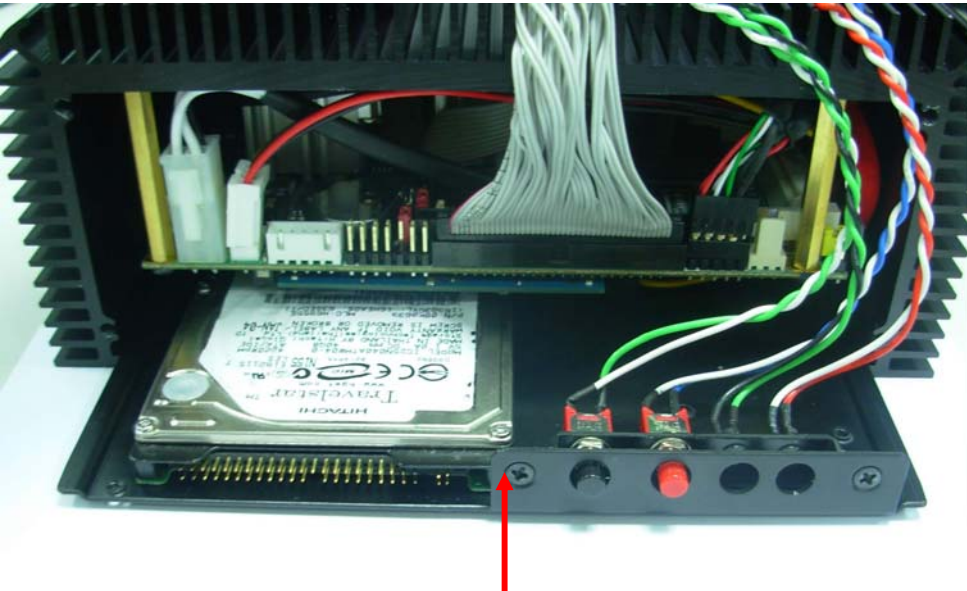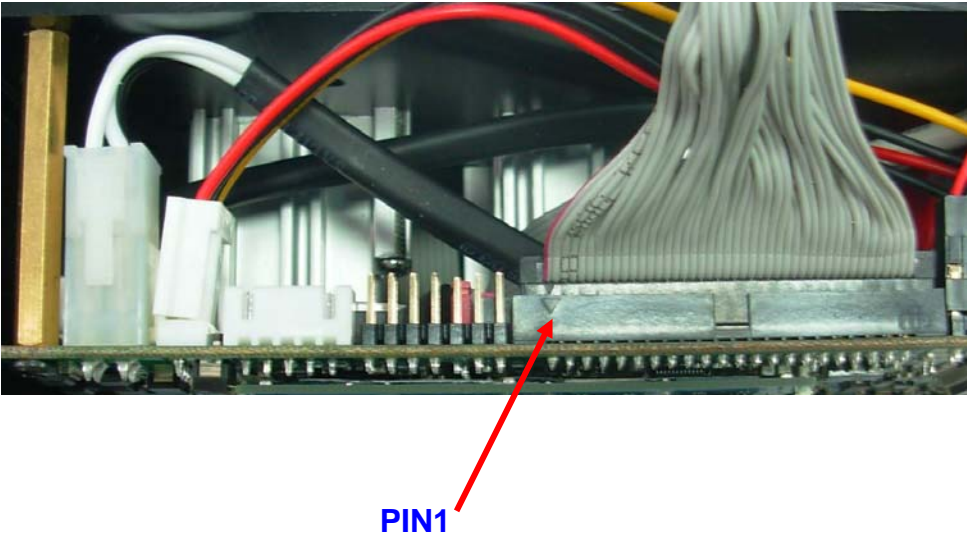

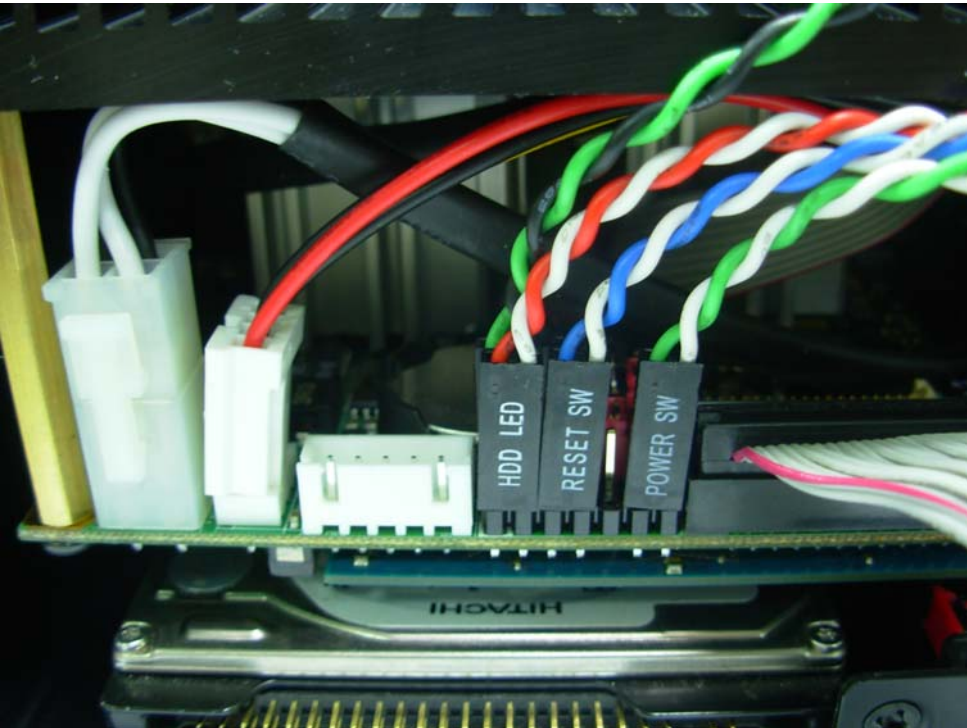


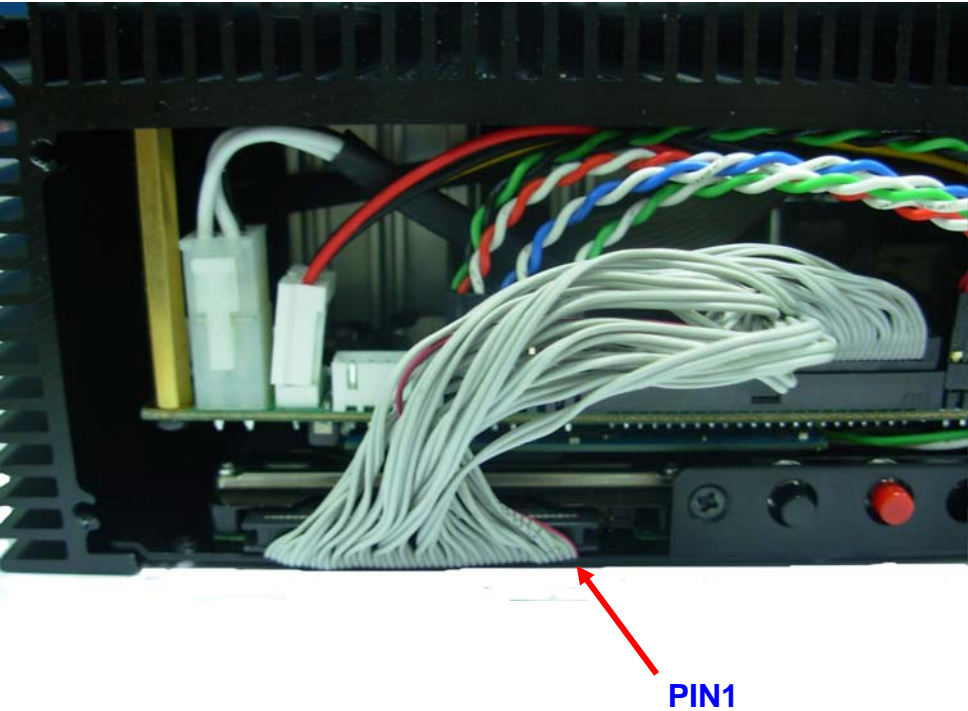


9. Put back the front panel, and lock the front panel screws.



10. Lock the chassis foot screws.

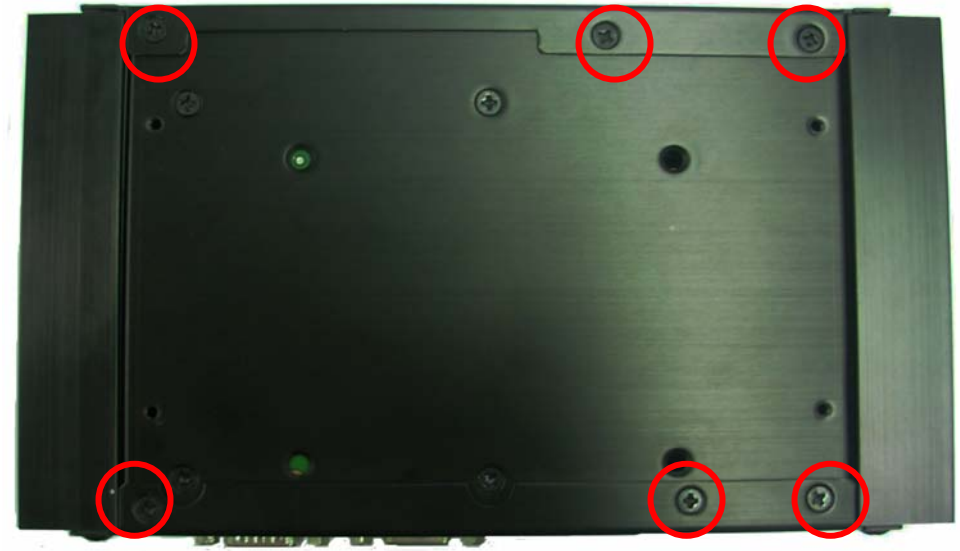

11. Then put back the supports.

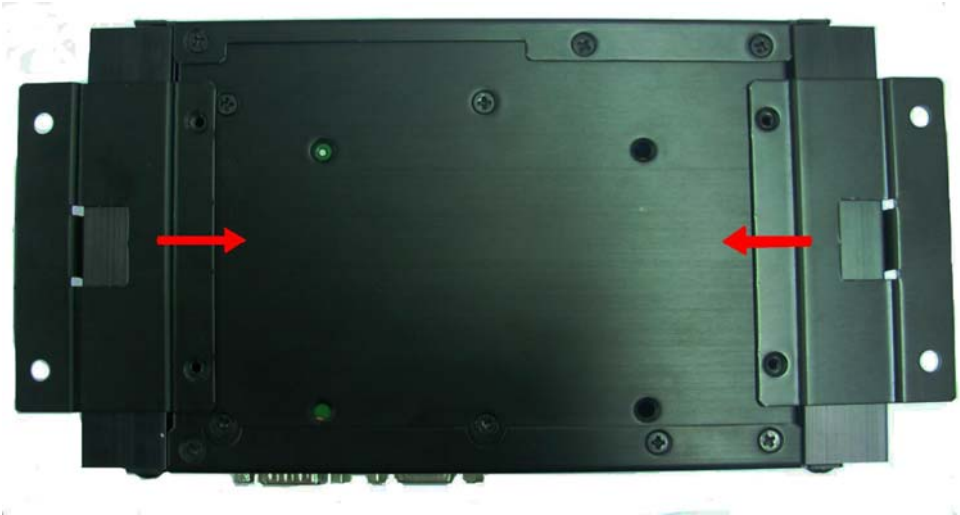

12. Lock the support screws.




Finished products





Use SATA HDD:

- 7. Put on HDD driver and lock the screws.

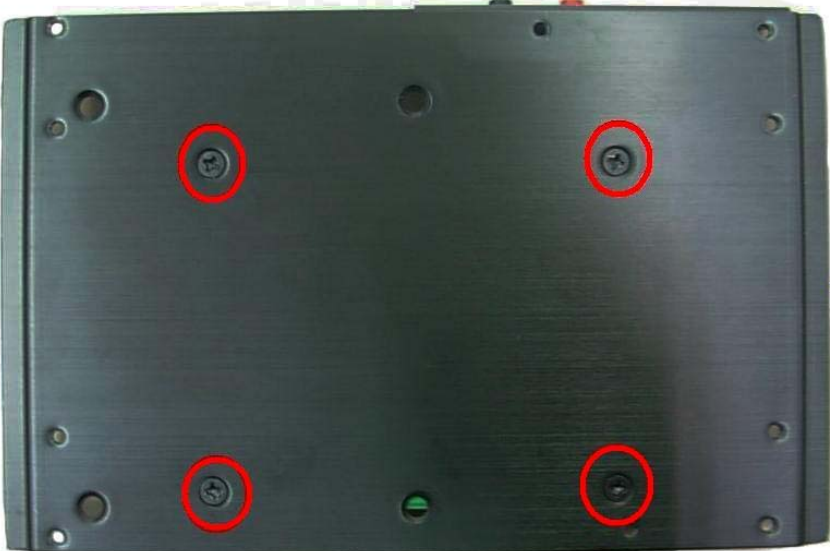

8. Connect the SATA and SATA power cable , power LED , HDD LED , reset bottom , power bottom cables.

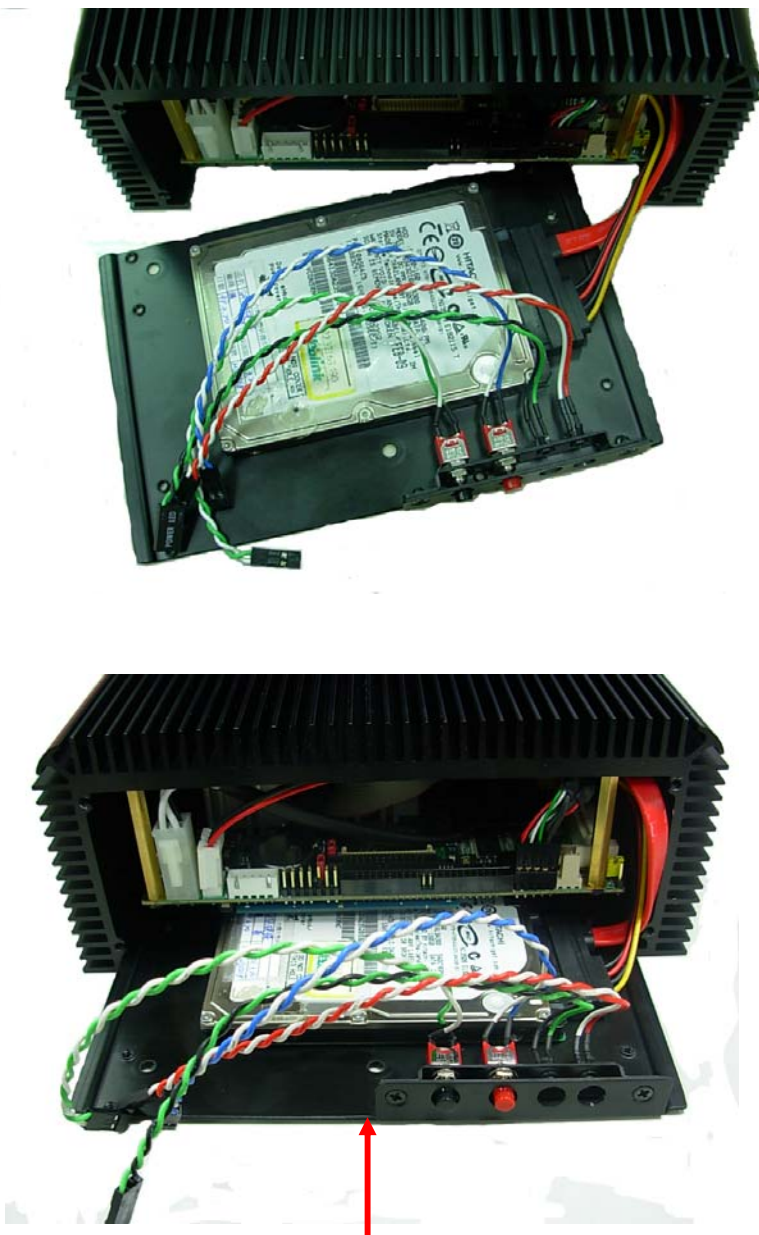


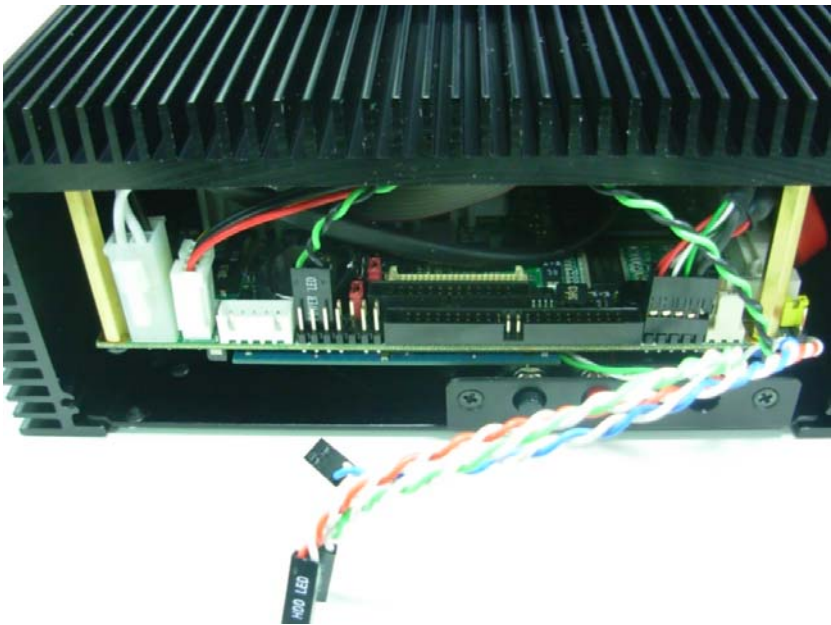


9. Put back the front panel, and lock the front panel screws.



10. Lock the chassis feet screws.

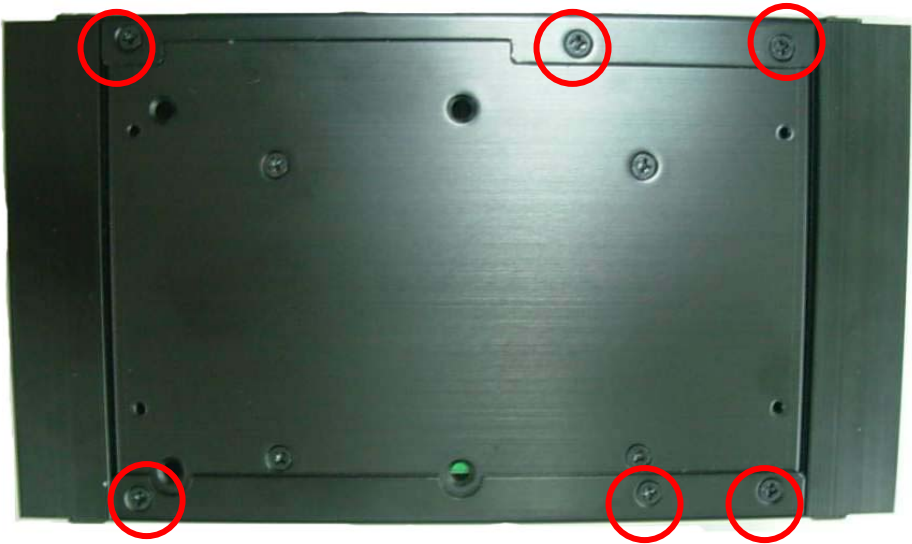

11. Then put back the supports.

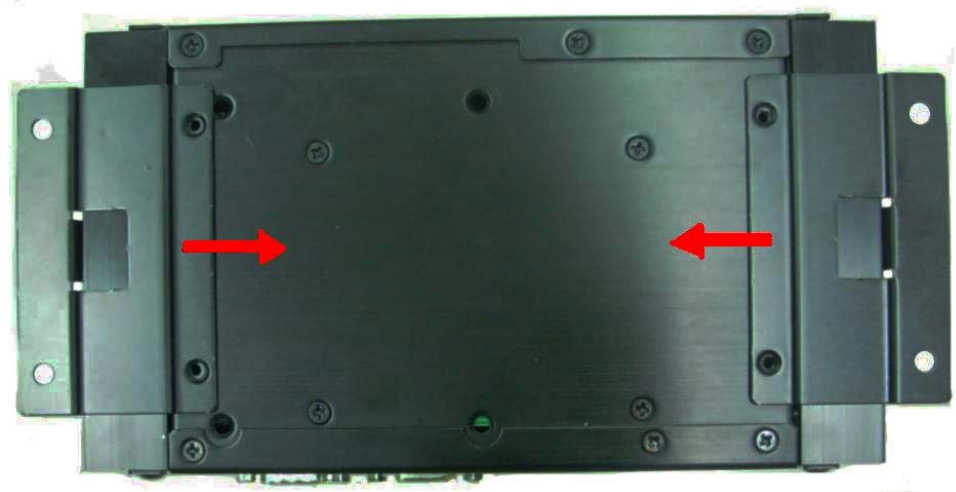

12. Lock the support screws.



Finished products



Specifications

Form Factor	Fanless barebone system
Drive Bay	Internal 1 x 2.5" IDE or SATA HDD
Front Panel	Power On/Off System Reset switch Power/HDD indicate LED
Mounting	Wall mounting / Desk
Rear Side I/O	Depend on 3.5 SBC rear IO
Environment	Operating Temperature: 0 ~ 40C
Power supply	DC jack for DC input
Dimension	195 x 110 x 80 mm
Weight	Approx. 1.41 kg (Without HDD)

Contact Information

Any advice or comment about our products and service, or anything we can help you please don't hesitate to contact with us. We will do our best to support you for your products, projects and business

Taiwan Commate Computer Inc.

Address	19F, No.94, Sec.1, Xintai 5th Rd., Xizhi Dist., New Taipei City, Taiwan
TEL	+886-2-26963909
FAX	+886-2-26963911
Website	http://www.commell.com.tw
E-Mail	info@commell.com.tw (General Information) tech@commell.com.tw (Technical Support)
Facebook	https://www.facebook.com/pages/Taiwan-Commate-Computer-Inc/547993955271899
Twitter	https://twitter.com/Taiwan_Commate

Commell is a brand name of Taiwan Commate Computer Inc.