

CMPK-374X-12T

Features:

- 12.1" SVGA TFT-LCD with Touch Screen , Fan-less and compact design
- Onboard low power Intel® Atom™ processor N270 1.6 GHz at 533 MHz FSB
- DDR2 up to 2.0 GB , Intel® Gigabit Ethernet , USB2.0 , SATA , CF socket
- IP65 in the front bezel , VESA 100mm x 100mm / 75mm x 75mm
- Windows® XP Embedded operate system for optional



Specifications:

System		LCD Panel	
Processor	: Intel® Atom™ processor N270 at 1.6 GHz	Display Type	: 12.1" TFT LCD
Chipset	: Intel® 945GSE & ICH7M	Resolution	: 800 x 600
System memory	: DDR2 SODIMM up to 2.0 GB	Brightness	: 500 cd/m ²
I/O Ports	: 1 x RJ45 , 10/100/1000 Based-TX	Contrast	: 700 : 1
	1 x PS/2 Keyboard / Mouse	Construction	: High quality aluminum bezel + steel chassis
	2 x USB 2.0	Color	: Silver
	1 x DB15 VGA	IP Level	: IP65 in the front bezel
	1 x DB9 RS232	Touch Screen	: 5-wire Resistive-Type
	1 x DB9 RS232/422/485 (Optional)		
Storage	: 1 x Compactflash socket		
	1 x 2.5" HDD driver bay	Physical	
Expansion Slot	: 1 x Mini-PCI	Construction	: High quality aluminum bezel + steel chassis
Watch Dog Timer	: System reset programmable watchdog timer	Color	: Silver
	With 1 ~ 255 second / Minute	IP Level	: IP65 in the front bezel
Power supply	: External DC input ,	Mounting	: Panel Mount, VESA 100mm x 100mm
	12V/80W power adapter		: VESA 75mm x 75mm (optional)
		Dimension	: 349 x 249 x 70 mm

Environment	
Operating Temp.	: 0°C~40°C
Storage Temp.	: -10°C~70°C
Humidity	: 0% ~ 90% relative Humidity , Non-condensing



Taiwan Commate Computer Inc.

19F, NO. 94, Sec. 1, Shin Tai Wu Rd., Hsi Chih, Taipei Shien, Taiwan.


TEL: +886-2-26963909

Website: www.commell.com.tw


FAX: +886-2-26963911

E-mail: info@commell.com.tw

Dimensions (Unit: mm) :

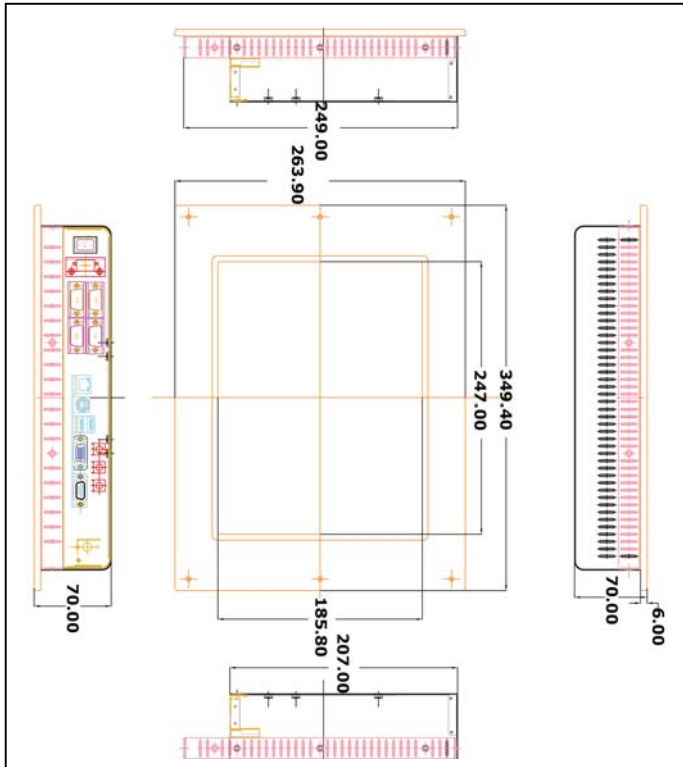

External I/O Ports :

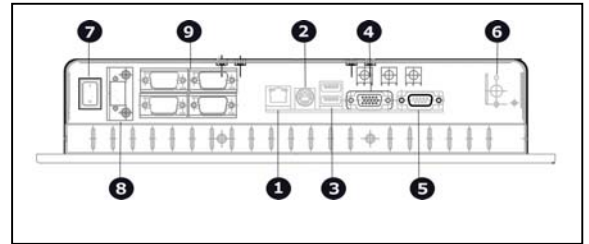

- | | |
|-----------------------------|-------------------------|
| 1. RJ45 LAN | 2. PS/2 KB+MS |
| 3. Dual USB2.0 | 4. DB15 VGA |
| 5. COM1 (RS232) | 6. DC input |
| 7. Power Switch | 8. DC-IN Terminal block |
| 9. COM3 ~ COM6 (Optional) | |

Packing List

- 1 x Utility Disc
- 1 x 44-pin IDE cable
- 1 x SATA cable
- 4 x screws for 2.5" HDD
- 1 x 12V/80W adapter with US power code

Ordering Code

CMPK-374X-12T	12.1" Panel PC with touch screen , 12V/80W adapter
HDD	2.5" IDE / SATA Hard Disk
Solid State Disk	Compactflash card from 512 MB to 8.0 GB
Memory	DDR2 SO-DIMM 512 MB ~ 2.0 GB
Operating System	Windows XP Embedded

Taiwan Commate Computer Inc.

19F, NO. 94, Sec. 1, Shin Tai Wu Rd., Hsi Chih, Taipei Shien, Taiwan.

TEL: +886-2-26963909

Website: www.commell.com.tw

FAX: +886-2-26963911

E-mail: info@commell.com.tw

COMMELL

Stage For Your Success